


Smart Energy Center

SUN2000-3.8/5/7.6/9/10/11.4KTL-USL0

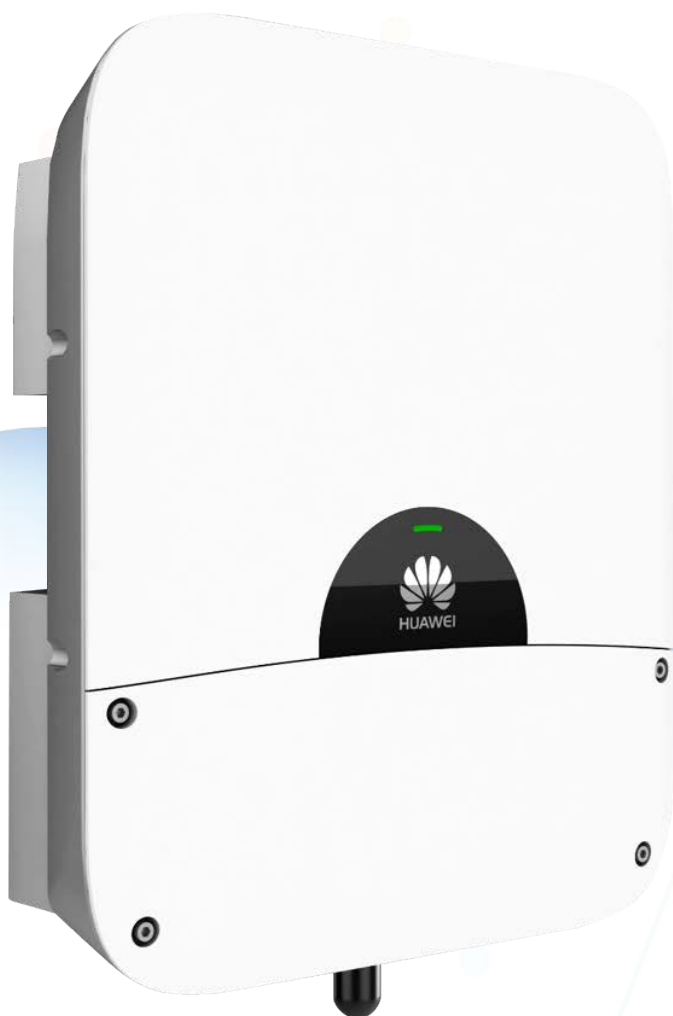

Higher Yields

- High-efficiency inverter topology, CEC efficiency 99%

Simple & Easy

- Simple, elegant, single box design
- 7.6KTL 39.7 lb. (18 kg), easy installation by one technician
- No wearable parts like LCD, button or fans
- Modular design for easy Power Unit replacement

Safe & Reliable

- Protection rating: TYPE 4X/IP65, natural convection
- Arc fault protection and rapid shutdown in compliance with NEC 2014 and 2017

Future Proof

- Optimized for PV + Storage
- Energy storage interface for all sizes
- Battery ready for future expansion any time
- UL9540 certified for PV + Storage system
- Ready for rapid shutdown NEC 2017

Smart Energy Center (SUN2000-3.8/5/7.6/9/10/11.4KTL-USL0)



Technical Specification	SUN2000-3.8KTL-USL0	SUN2000-5KTL-USL0	SUN2000-7.6KTL-USL0	SUN2000-9KTL-USL0	SUN2000-10KTL-USL0	SUN2000-11.4KTL-USL0
Efficiency						
Maximum efficiency	99%					
CEC weighted efficiency	99%					
Input						
Recommended DC power	5,130 Wp	6,750 Wp	10,260 Wp	12,150 Wp	13,500 Wp	15,400 Wp
Maximum input voltage	500 Vdc					
Rated input voltage	370 Vdc					
Number of inputs	2			3		
Maximum input current	15 A x 2			15 A x 3		
Output						
Rated output power	3.3 kW @ 208 V 3.8 kW @ 240 V	4.3 kW @ 208 V 5.0 kW @ 240 V	6.6 kW @ 208 V 7.6 kW @ 240 V	7.8 kW @ 208 V 9.0 kW @ 240 V	8.7 kW @ 208 V 10.0 kW @ 240 V	9.9 kW @ 208 V 11.4 kW @ 240 V
Maximum output power	3.3 kW @ 208 V 3.8 kW @ 240 V	4.3 kW @ 208 V 5.0 kW @ 240 V	6.6 kW @ 208 V 7.6 kW @ 240 V	7.8 kW @ 208 V 9.0 kW @ 240 V	8.7 kW @ 208 V 10.0 kW @ 240 V	9.9 kW @ 208 V 11.4 kW @ 240 V
Rated output voltage	208 Vac, 240 Vac					
Rated AC grid frequency	60 Hz					
Maximum output current	15.9 A	20.9 A	31.7 A	37.5 A	41.7 A	47.5 A
Adjustable power factor	0.8 leading ... 0.8 lagging					
Max. total harmonic distortion	≤ 3%					
Feature						
Revenue grade data ANSI C12.20	0.5% RGM					
Rapid shutdown – NEC 2014 and 2017 per article 690.11 and 690.12	Yes					
Protection						
AFCI compliant to UL 1699B	Yes					
DC disconnect device	Yes					
Anti-islanding protection	Yes					
DC reverse polarity protection	Yes					
Insulation monitoring	Yes					
DC surge arrester	Yes					
AC surge arrester	Yes					
Residual current detection	Yes					
AC over-current protection	Yes					
AC short-circuit current capability	Yes					
AC over-voltage protection	Yes					
Over-heat protection	Yes					
Ground-fault isolation detection	Yes					
General Specification						
AC output & backup output conduit size	0.75" Conduit			1.00" Conduit		
PV input, battery input conduit size	0.75" Conduit			0.75" Conduit		
Communication input conduit size	0.75" Conduit			0.75" Conduit		
Operating temperature range	-30°C ~ 60°C (-22°F ~ 140°F)					
Relative humidity	0 ~ 100% RH					
Transformerless	Yes					
Cooling	Natural convection					
Noise emission (typical)	< 25 dB (A)			< 29 dB (A)		
Display	LED indicators					
Supported communication interface	RS485, WLAN, 4G (optional)					
Weight	39.7 lb. (18.0 kg)			50.7 lb. (23.0 kg)		
Dimensions (W x H x D)	15.8 in x 22.4 in x 6.3 in (400 mm x 570 mm x 160 mm)			17.5 in x 25.5 in x 6.3 in (445 mm x 650 mm x 160 mm)		
Protection rating	TYPE 4X / IP65					
Self-consumption at night	< 2.5 W (with battery enabling < 5 W)					
Backup						
Rated continuous output power	3.5 kVA @ 240 V			5 kVA @ 240 V		
Peak output power	3.8 kVA 10s @ 240 V	5 kVA 10s @ 240 V			7 kVA 10s @ 240 V	
Battery Compatibility						
Battery	All series support LG Chem RESU 10H (Type-R)					
Standards Compliance (more available upon request)						
EMC	FCC Part 15 Class B					
Safety	UL 1741, UL 1741SA, UL 1998, UL 1699B, UL 62109-1, UL 9540, CAN/CSA C22.2 107.1-1					
Grid connection standards	IEEE 1547A, CA Rule 21 (UL 1741SA)					
Others	ANSI C12.20, Sunspec Certified™					

The text and figures reflect the current technical state at the time of printing. Subject to technical changes. Errors and omissions excepted. Huawei assumes no liability for mistakes or printing errors. For more information, please visit solar.huawei.com. Version No.01-(2018828)