

# LEO 350-360 W

Premium PV Panel

**The durable one.**  
**For a green planet.**



## GENERATE MORE POWER

Shows an extremely high resistance to degradation phenomena (PID & LeTID).



## EXTREMELY WEATHER RESISTANT

Certified to withstand 8100 Pa Snowload & 3600 Pa Windload & 40 mm Hailstones (Hail-Class 4).



## POWERFUL IN ALL ENVIRONMENTS

Certified to perform in coastal areas (salt-mist), deserts (dust) and farmland (ammonia).



## PACKED FOR SAFE TRANSPORT

Packed upright, avoiding the emergence of microcracks and thus ensuring factory quality at the place of delivery.



## MAXIMUM USE OF SPACE

LEO-Panels with 108 & 96 cells can be combined without add-ons. For maximum energy generation on the roof.



## A SUSTAINABLE CHOICE

A premium product, which lasts for decades. Manufactured according to rigid environmental standards. Produced with 100 % green electricity.

## MADE IN GERMANY!

Right here. In Prenzlau. In our production facility.  
Here we manufacture under the aspects of quality & durability since 2001.

## FULL SERENITY



Years linear  
**Power Guarantee**



Years  
**Product Warranty**

100% cost recovery of guarantee claims.  
Under the terms and conditions of the respective guarantee certificate.

QUALITY UNDER HAND AND SEAL




[www.aleo-solar.com](http://www.aleo-solar.com)

**aleo**

# aleo solar panel LEO 350-360W Premium

## DIMENSIONS [mm]

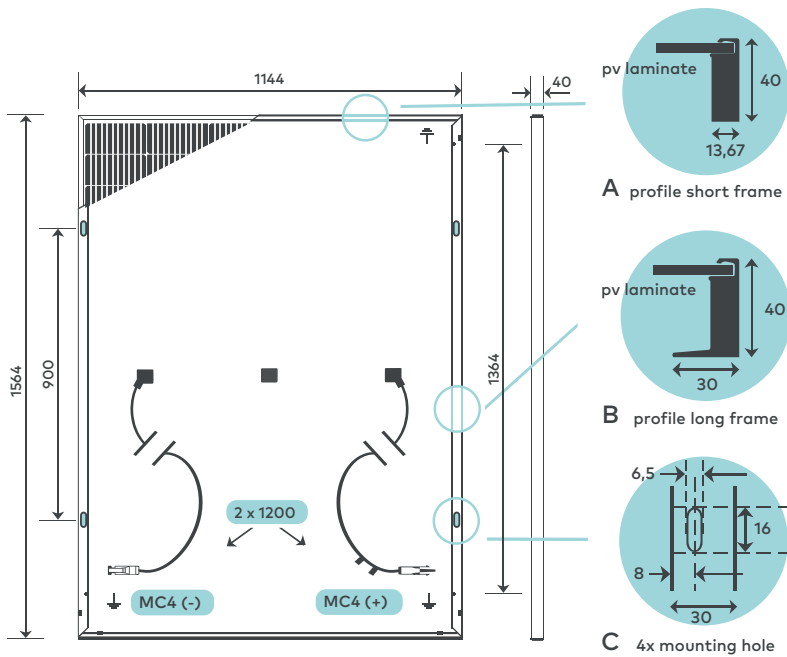

## BASIC MODULE DATA

Length x width x height	[mm]	1564 x 1144 x 40
Weight	[kg]	20.5
Number of cells		96
Cell size	[mm]	182 x 91
Cell material		Monocrystalline Si, PERC
Number of Busbars		10
Front sheet		3.2 mm Solar glass (TSG)
Back sheet		Polymer sheet, white
Frame material		Al alloy, black

## BASIC DATA JUNCTION BOX

3 parts junction box acc. to IEC 62790	[mm]	left & right: 62 x 58 x 14 middle: 49 x 55 x 14
Bypass diodes		3 (one per box)
IP class		IP68
Cable	[mm]	1200 (+), 1200 (-) acc. to EN 50618
Connectors		genuine MC4 acc. to EN 62852

## ELECTRICAL DATA (STC)

		L62S350	L62S355	L62S360
Rated power	$P_{MPP}$ [W]	350	355	360
Rated voltage	$V_{MPP}$ [V]	27.47	27.66	27.85
Rated current	$I_{MPP}$ [A]	12.74	12.83	12.92
Open-circuit voltage	$V_{OC}$ [V]	32.82	32.94	33.06
Short-circuit current	$I_{SC}$ [A]	13.34	13.44	13.53
Efficiency	$\eta$ [%]	19.6	19.8	20.1

Electrical values measured under standard test conditions (STC): 1000 W/m<sup>2</sup>; 25 °C; AM 1.5

## ELECTRICAL DATA (LOW IRRADIANCE)

		L62S350	L62S355	L62S360
Power	$P_{MPP}$ [W]	67	68	69

Electrical values measured under: 200 W/m<sup>2</sup>; 25 °C; AM 1.5

Measurement tolerance of  $P_{MPP}$  under STC -3/+3 %

Accuracy of other electrical values -10/+10 %

Efficiency related to gross module area

## CLASSIFICATION

Classification range (positive classification) [W] 0/+4.99

## CERTIFICATIONS

Fire Resistance Class C

Protection Against Electric Shock II

IEC 61215:2021, IEC 61730:2016 including:

- IEC 62804 - PID Resistance

- IEC/TS 62782:2016 - Dynamic mechanical load testing

IEC 62716 - Ammonia Resistance

LeTID Resistance

IEC 61701 - Salt mist Resistance

IEC 60068-2-68:1994 - Sand- and Dust test

Hail resistance class 4 (40 mm hailstones)

Snail trail free (AgNP Test)

System Certifications acc. to DIN EN ISO 9001:2015, 14001:2015, 50001:2018 and DIN ISO 45001:2018

## LOADS

Max. module pressure load (Testload)	[Pa]	8100 <sup>1</sup>
Max. module pressure load (Designload) <sup>2</sup>	[Pa]	5400 <sup>1</sup>
Max. module suction load (Testload)	[Pa]	3600 <sup>1</sup>
Max. module suction load (Designload) <sup>2</sup>	[Pa]	2400 <sup>1</sup>
Max. system voltage	[V <sub>OC</sub> ]	1000
Reverse current load	$I_R$ [A]	25

Mechanical load acc. to IEC/EN 61215:2021

<sup>1</sup> Please observe the mounting conditions in the installation manual

<sup>2</sup> Testload/Safety factor 1.5 = Designload


## TEMPERATURE COEFFICIENTS

Temperature coefficient $I_{SC}$	$\alpha(I_{SC})$	[%/K]	+0.03
Temperature coefficient $V_{OC}$	$\beta(V_{OC})$	[%/K]	-0.26
Temperature coefficient $P_{MPP}$	$\gamma(P_{MPP})$	[%/K]	-0.34

## GUARANTEES

Product Guarantee	25 years
Power Guarantee	25 years - linear

## PERFORMANCE GUARANTEE

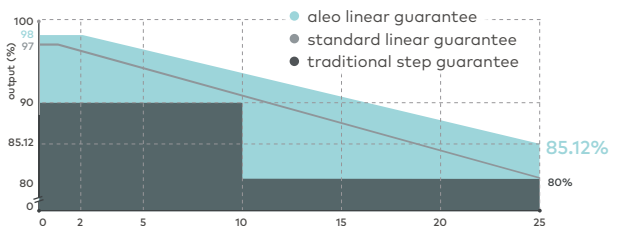

PLEASE CONTACT YOUR AUTHORISED ALEO DEALER

## ALEO SOLAR GMBH

Marius-Eriksen-Straße 1  
17291 PRENZLAU  
GERMANY

## CONTACT

+49 3984-8328-0  
info@aleo-solar.com  
www.aleo-solar.com

©aleo solar GmbH 04/2022

aleo

Detailed information about our warranties is available on our website | Subject to change without notice | Errors and omissions excepted | EN | LEO 350-360W