

AstroNova™

Profitable for Decades



325W~335W

5BB-Polycrystalline PV Module

CHSM6612P Series (156.75)

CHSM6612P/HV Series (156.75)

CHSM6612P max system voltage 1000V standard

CHSM6612P/HV max system voltage 1500V standard

Tier 1

Bloomberg


No.1

PHOTON



DNV GL

2018 TOP
Performance

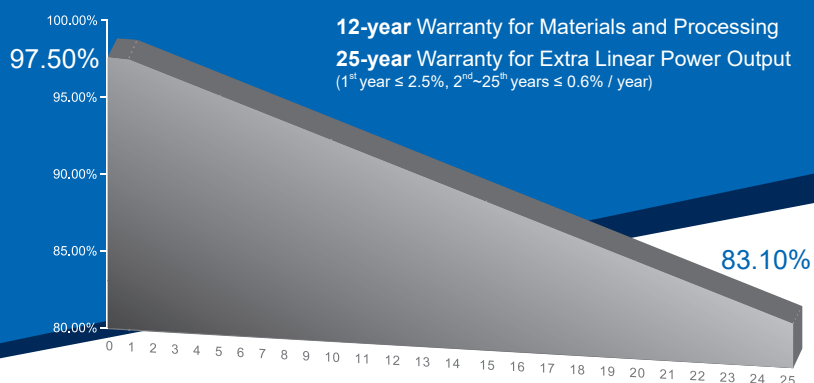

KEY FEATURES



OUTPUT POSITIVE TOLERANCE

Guaranteed 0~+5W positive tolerance ensures power output reliability.



INNOVATIONAL 5-BUSBAR CELLS

Reduces the cell series resistance and internal stress, decreases the risk of micro-crack and improves the module output.



EXCELLENT MECHANICAL LOAD CAPABILITY

Certified to withstand: snow load (5400 Pa) and wind load (2400 Pa).



LOW-LIGHT IRRADIANCE

With the deep textured ARC glass and cell surface texturing process, achieve the excellent performance at the haze, cloudy days and other low light conditions.

COMPREHENSIVE CERTIFICATES



Special for Australian Market



ASTRONERGY
A CHNT COMPANY

ELECTRICAL SPECIFICATIONS

STC rated output (P_{mpp})*	325 Wp	330 Wp	335 Wp
Rated voltage (V_{mpp}) at STC	37.11 V	37.15 V	37.26 V
Rated current (I_{mpp}) at STC	8.77 A	8.89 A	9.00 A
Open circuit voltage (V_{oc}) at STC	45.67 V	45.86 V	45.98 V
Short circuit current (I_{sc}) at STC	9.48 A	9.52 A	9.57 A
Module efficiency	16.7%	17.0%	17.2%
Rated output (P_{mpp}) at NMOT	226.9 Wp	230.4 Wp	233.9 Wp
Rated voltage (V_{mpp}) at NMOT	33.86 V	33.92 V	34.01 V
Rated current (I_{mpp}) at NMOT	6.70 A	6.79 A	6.88 A
Open circuit voltage (V_{oc}) at NMOT	41.91 V	42.08 V	42.19 V
Short circuit current (I_{sc}) at NMOT	7.33 A	7.37 A	7.40 A
Temperature coefficient (P_{mpp})	- 0.408%/°C		
Temperature coefficient (I_{sc})	+0.050%/°C		
Temperature coefficient (V_{oc})	- 0.311%/°C		
Nominal module operating temperature (NMOT)	46±2°C		
Maximum system voltage (IEC/UL)	1000V _{DC} or 1500V _{DC}		
Number of diodes	3		
Junction box IP rating	IP 67		
Maximum series fuse rating	15 A		



Power Sorting: 0~+5W

* Measurement tolerance +/- 3%

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

NOCT: Irradiance 800W/m², Ambient Temperature 20°C, AM=1.5, Wind Speed 1m/s

CURVE

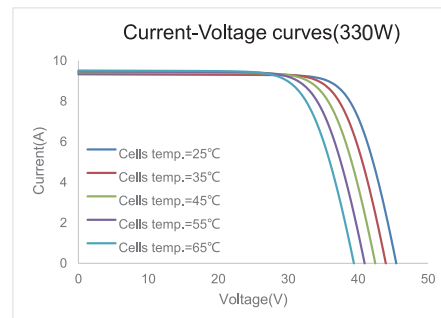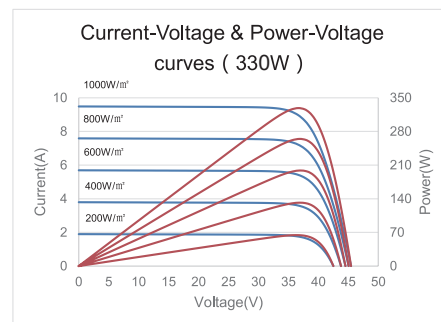

MECHANICAL SPECIFICATIONS

Outer dimensions (L x W x H)	1960 x 992 x 40 mm 77.17 x 39.06 x 1.57 in
Frame technology	Aluminum, silver anodized
Module composition	Glass / EVA / Backsheet (white)
Front glass thickness	3.2 mm / 0.13 in
① Cable length (IEC/UL)	1150 mm / 45.28 in
Cable diameter (IEC/UL)	4 mm ² / 12 AWG
② Maximum mechanical test load	5400 Pa (front) / 2400 Pa (back)
Fire performance (IEC/UL)	Class C (IEC) or Type 1 (UL)
Connector type (IEC/UL)	MH5(Logo:MINGHE) or PV-HCB40(Logo:Chint Solar) or PV-KST4-EVO2/XY,PV-KBT4-EVO2/XY(Logo:MC) or PV-KST4/6II-UR, PV-KBT4/6II-UR(Logo:MC) or PV-KST4/xy, PV-KBT4/xy(Logo:MC)

① Option: 900(+)/600(-) mm for defined projects in advance.


② Refer to Astronergy Crystalline Silicon PV Module Installation Manual or contact technical department.
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load.

PACKING SPECIFICATIONS

① Weight (module only)	21.9 kg / 48.28 lbs
② Packing unit	27 pcs / box
Weight of packing unit (for 40'HQ container)	636 kg / 1402 lbs
Number of modules per 40'HQ container	648 pcs

① Tolerance +/- 1.0kg
② Subject to sales contract

MODULE DIMENSION DETAILS

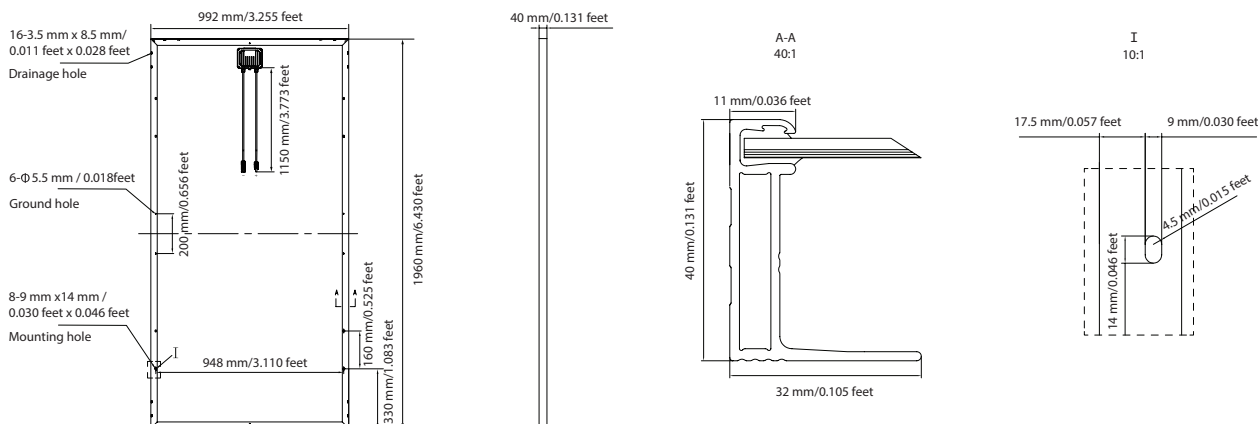

Made in Zhejiang, Jiangsu and Anhui of China, Made in Sincan/ Ankara of Turkey.

© Chint Solar (Zhejiang) Co., Ltd. Reserves the right of final interpretation. please contact our company to use the latest version for contract.

<http://energy.chint.com>