


ASTRO 4 Twins

Create Sustainable and Efficient Green Energy

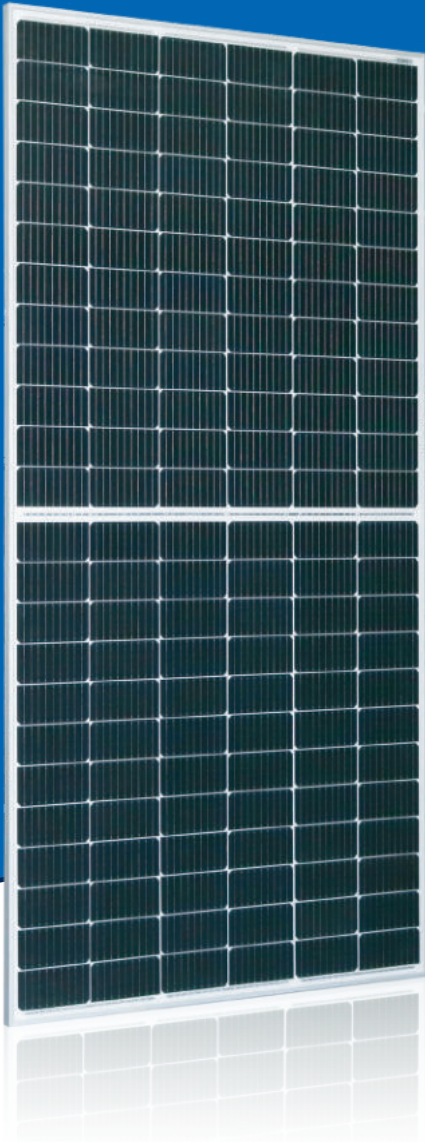


435W~455W

Monocrystalline PV Module

CHSM72M(DG)/F-BH Series (166)

CHSM72M(DG)/F-BH is bifacial module with white glazed glass

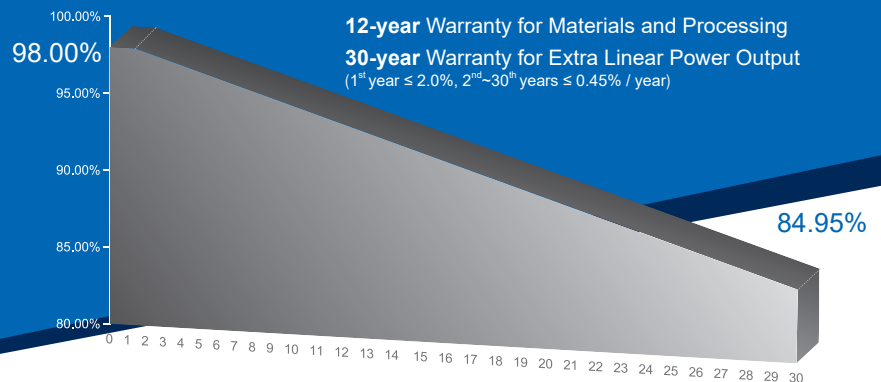

KEY FEATURES



OUTPUT POSITIVE TOLERANCE

Guaranteed 0~+5W positive tolerance to ensure power output.



INNOVATIONAL HALF-CUT TECHNOLOGY

Better shading tolerance, higher reliability.



INNOVATIONAL MULTI-BUSBAR TECHNOLOGY

Higher light absorption, lower risk of microcrack.



SUPER PERC+ CELL TECHNOLOGY

Higher module power and module efficiency, lower power degradation.



BIFACIAL POWER

Up to 25% additional power gain from rear side.



APPLICABLE FOR MULTI DIFFERENT ENVIRONMENTS

Wide range of applications, such as snow areas, high humidity areas and strong sandstorm areas, etc.

COMPREHENSIVE CERTIFICATES



Designed for the Australian Market



ASTRONERGY
A CHNT COMPANY

ELECTRICAL SPECIFICATIONS

Power rating (front)	435 Wp		440 Wp		445 Wp		450 Wp		455 Wp	
Testing Condition	Front	Back	Front	Back	Front	Back	Front	Back	Front	Back
STC rated output (P_{mpp}/Wp)	435	304	440	308	445	311	450	315	455	318
Rated voltage (V_{mpp}/V) at STC	40.85	41.64	41.12	41.85	41.36	42.03	41.59	42.28	41.82	42.34
Rated current (I_{mpp}/A) at STC	10.65	7.30	10.70	7.36	10.76	7.40	10.82	7.45	10.88	7.51
Open circuit voltage (V_{oc}/V) at STC	48.90	47.56	49.11	47.83	49.44	47.99	49.78	48.25	50.07	48.42
Short circuit current (I_{sc}/A) at STC	11.12	7.99	11.20	8.05	11.25	8.10	11.3	8.16	11.36	8.21
Module efficiency	20.0%	14.0%	20.2%	14.2%	20.5%	14.3%	20.7%	14.5%	20.9%	14.6%
Temperature coefficient (P_{mpp})	- 0.35%/°C									
Temperature coefficient (I_{sc})	+0.035%/°C									
Temperature coefficient (V_{oc})	- 0.28%/°C									
Nominal module operating temperature (NMOT)	41±2°C									
Maximum system voltage (IEC/UL)	1500V _{DC}									
Number of diodes	3									
Junction box IP rating	IP 68									
Maximum series fuse rating	20 A									

* Measurement tolerance +/- 3%

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

ELECTRICAL SPECIFICATIONS (Integrated power)

P_{mpp} gain	P_{mpp}	V_{mpp}	I_{mpp}	V_{oc}	I_{sc}
5%	462 Wp	41.12 V	11.24 A	49.11 V	11.69 A
10%	484 Wp	41.12 V	11.77 A	49.11 V	12.24 A
15%	506 Wp	41.12 V	12.31 A	49.11 V	12.80 A
20%	528 Wp	41.02 V	12.87 A	49.21 V	13.33 A
25%	550 Wp	41.02 V	13.41 A	49.21 V	13.88 A

* Measurement tolerance +/- 3%


Electrical characteristics with different rear power gain (reference to 440W)

MECHANICAL SPECIFICATIONS

Outer dimensions (L x W x H)	2094 x 1038 x 30 mm
Frame technology	Aluminum, silver anodized
Glass thickness	2.0 mm
Cable length (IEC/UL)	Portrait: 300 mm Landscape: 1300 mm
Cable diameter (IEC/UL)	4 mm ² / 12 AWG
① Maximum mechanical test load	5400 Pa (front) / 2400 Pa (back)
Connector type (IEC/UL)	HCB40 / MC4-EVO2


① Refer to Astronergy crystalline installation manual or contact technical department.
Maximum Mechanical Test Load=1.5×Maximum Mechanical Design Load.

MODULE DIMENSION DETAILS

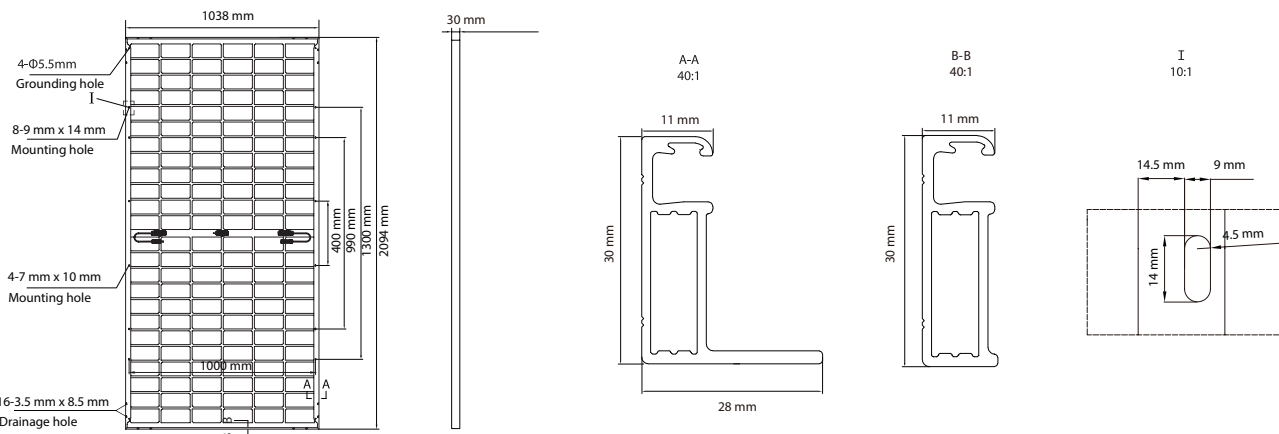


CURVE

Current-Voltage & Power-Voltage curves(440W)

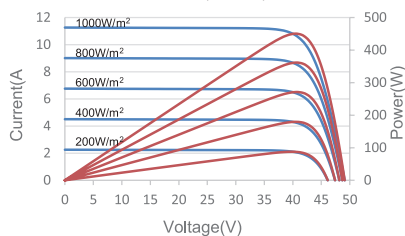

Current-Voltage curves(440W)

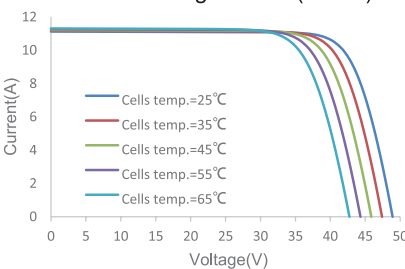

PACKING SPECIFICATIONS

① Module Weight	27.5 kg
② Packing unit	36 pcs / box
Weight of packing unit (for 40'HQ container)	1035 kg
Number of modules per 40'HQ container	792 pcs

① Tolerance +/- 1.0kg
② Subject to sales contract