

High density MONO PERC module

(IEC1000 V)

MORE POWER



Maximize the light absorption area,
module efficiency up to 20.46 %



Low temperature coefficient (Pmax):
-0.37 % / °C



Better shading tolerance

MORE RELIABLE



Lower internal current,
lower hot spot temperature



Minimizes micro-crack impacts



Heavy snow load up to 5400 Pa,
wind load up to 2400 Pa*



**enhanced product warranty on materials
and workmanship***



linear power output warranty*

*According to the applicable Canadian Solar Limited Warranty Statement.

MANAGEMENT SYSTEM CERTIFICATES*

ISO 9001: 2015 / Quality management system
ISO 14001: 2015 / Standards for environmental management system
ISO 45001: 2018 / International standards for occupational health & safety

PRODUCT CERTIFICATES*

IEC 61215 / IEC 61730: VDE / CE / MCS / JET / INMETRO
UL 1703 / IEC 61215 performance: CEC listed (US) / FSEC (US Florida)
UL 1703: CSA / IEC 61701 ED2: VDE / IEC 62716: VDE
UNI 9177 Reaction to Fire: Class 1 / Take-e-way
Canadian Solar recycles panels at the end of life cycle



* The specific certificates applicable to different module types and markets will vary, and therefore not all of the certifications listed herein will simultaneously apply to the products you order or use. Please contact your local Canadian Solar sales representative to confirm the specific certificates available for your Product and applicable in the regions in which the products will be used.

CSI Solar Co., Ltd. is committed to providing high quality solar products, solar system solutions and services to customers around the world. Canadian Solar was recognized as the No. 1 module supplier for quality and performance/price ratio in the IHS Module Customer Insight Survey, and is a leading PV project developer and manufacturer of solar modules, with over 50 GW deployed around the world since 2001.


* For detailed information, please refer to Installation Manual.

Canadian Solar MSS (Australia) Pty Ltd.


44 Stephenson St, Cremorne VIC 3121, Australia, sales.au@csisolar.com, www.csisolar.com/au

ENGINEERING DRAWING (mm)


Rear View

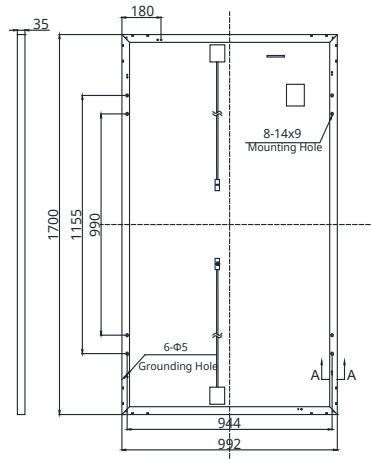


Frame Cross Section A-A



Mounting Hole



CS1H-330MS / I-V CURVES

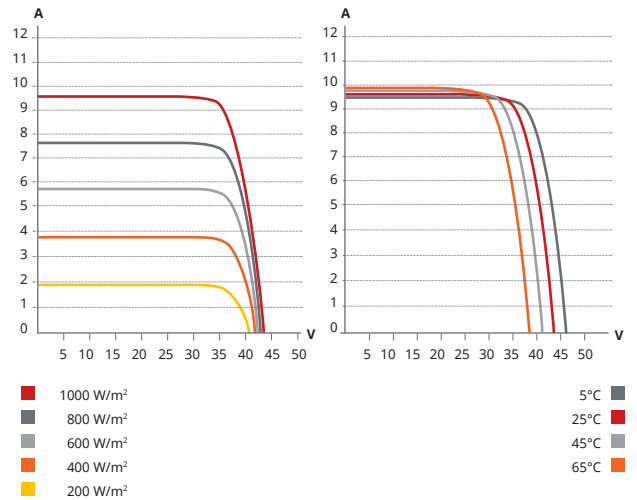

ELECTRICAL DATA | STC*

CS1H	320MS	325MS	330MS	335MS	340MS	345MS
Nominal Max. Power (Pmax)	320 W	325 W	330 W	335 W	340 W	345 W
Opt. Operating Voltage (Vmp)	36.2 V	36.6 V	37.0 V	37.4 V	37.8 V	38.2 V
Opt. Operating Current (Imp)	8.85 A	8.88 A	8.92 A	8.96 A	9.00 A	9.04 A
Open Circuit Voltage (Voc)	44.0 V	44.1 V	44.2 V	44.3 V	44.5 V	44.6 V
Short Circuit Current (Isc)	9.60 A	9.64 A	9.68 A	9.72 A	9.76 A	9.80 A
Module Efficiency	19.0%	19.3%	19.6%	19.9%	20.2%	20.5%
Operating Temperature	-40°C ~ +85°C					
Max. System Voltage	1500V (IEC) or 1000V (IEC/UL)					
Module Fire Performance	TYPE 1 (UL 1703) or CLASS C (IEC 61730)					
Max. Series Fuse Rating	16 A					
Application Classification	Class A					
Power Tolerance	0 ~ + 5 W					

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C. Measurement uncertainty: ±3 % (Pmax).

MECHANICAL DATA

Specification	Data
Cell Type	Mono-crystalline
Dimensions	1700 × 992 × 35 mm (66.9 × 39.1 × 1.38 in)
Weight	19.2 kg (42.3 lbs)
Front Cover	3.2 mm tempered glass
Frame	Anodized aluminium alloy
J-Box	IP68, 3 bypass diodes
Cable	4.0 mm² (IEC), 12 AWG (UL)
Cable Length (Including Connector)	1350 mm (53.1 in)
Connector	T4-PC-1 (IEC 1000 V) or PV-KST4/xy-UR, PV-KBT4/xy-UR (IEC 1000 V) or T4-PC-1 (IEC 1500 V) or T4-PPE-1 (IEC 1500 V) or PV-KST4-EVO2/XY, PV-KBT4-EVO2/XY (IEC 1500 V) or UTXCFA4AM, UTXC-MA4AM (IEC 1500 V)
Per Pallet	30 pieces
Per Container (40' HQ)	780 pieces

ELECTRICAL DATA | NMOT*

CS1H	320MS	325MS	330MS	335MS	340MS	345MS
Nominal Max. Power (Pmax)	237 W	241 W	244 W	248 W	252 W	255 W
Opt. Operating Voltage (Vmp)	33.5 V	33.9 V	34.2 V	34.6 V	35.0 V	35.3 V
Opt. Operating Current (Imp)	7.07 A	7.11 A	7.14 A	7.17 A	7.20 A	7.23 A
Open Circuit Voltage (Voc)	41.1 V	41.2 V	41.3 V	41.4 V	41.6 V	41.7 V
Short Circuit Current (Isc)	7.75 A	7.78 A	7.81 A	7.85 A	7.88 A	7.91 A

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m² spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

TEMPERATURE CHARACTERISTICS

Specification	Data
Temperature Coefficient (Pmax)	-0.37 % / °C
Temperature Coefficient (Voc)	-0.29 % / °C
Temperature Coefficient (Isc)	0.05 % / °C
Nominal Module Operating Temperature	43±3 °C

* The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. CSI Solar Co., Ltd. reserves the right to make necessary adjustment to the information described herein at any time without further notice.

Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.

PARTNER SECTION



Canadian Solar MSS (Australia) Pty Ltd.

44 Stephenson St, Cremorne VIC 3121, Australia, sales.au@csisolar.com, www.csisolar.com/au

March 2021. All rights reserved, PV Module Product Datasheet V5.61_AU
* Manufactured and assembled in China, Thailand and Canada.