

OpalSolar

QSA-60P Series

MULTICRYSTALLINE SILICON MODULE

Key Features



Up To 17.2% Module Efficiency



Multicrystalline Modules Designed For Residential, Commercial And Utility Applications - Rooftop Or Ground Mount



Positive Power Tolerance: 0 ~+5W



10 Year Product Warranty



Designed For IEC DC 1000V Applications

OPAL Solar is a premium product made by Tier 1 manufacturer on the basis of the local support, independent quality control, independent factory acceptance testing and technical support in Australia.

OPAL Solar is locally supported through Solar Juice Pty Ltd, the leading supplier of PV products in the Australian market. You can be assured that it is a trusted brand that does not compromise on quality.

The panels are produced by ISO 9001 and ISO 14001 certified production facilities. Back to back warranty agreements are in place to provide peace of mind.

For more information, please visit:
www.opalsolar.com.au



HEAD OFFICE

Solar Juice Pty Ltd
Unit 1, 10-12 Forsyth Close
Wetherill Park, NSW 2164
Phone: 02 9725 1111
solarjuice.com.au

COMPREHENSIVE CERTIFICATES

Certificates

IEC 61215, IEC 61730

Manufacturing Under

ISO 9001: 2008: Quality management systems

ISO 14001: 2004: Environmental management systems

CEC APPROVED

Certificate Holder: Solar Juice Pty Ltd

Model number:
QSA265P-60-S
QSA270P-60-S
QSA275P-60-S
QSA280P-60-S



For more information, please
scan the QR code or visit
www.opalsolar.com.au




MECHANICAL PARAMETERS

Cell	Polycrystalline
Weight(kg)	18.3kg (Pallet: 616kg)
Dimensions (LxWxH) (mm)	1648x990x35
No. of Cells and Connections	60 (60x10)
Frame	Aluminium, Silver Anodized
Junction Box/ Output Connectors	IP67, MC4 Genuine
Cable Length(mm)	1150
Front Glass Thickness(mm)	3.2
Packaging Configuration	31 Modules per Pallet


WORKING CONDITIONS

Maximum System Voltage	1000Vdc
Operating Temperature	-40 °C ~+ 85°C
NOCT	43±2 °C
Power Tolerance	0/+5 Wp
Mechanical Loading	5400Pa
Max. Fuse Current Rating	15A
Temperature Coefficient of Isc	+0.049%/°C
Temperature Coefficient of Voc	-0.310%/°C
Temperature Coefficient of Pmax	-0.407%/°C

ENGINEERING DRAWINGS

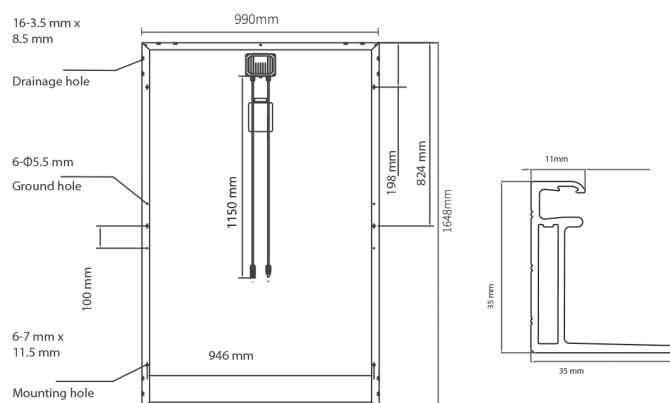

I-V CURVE

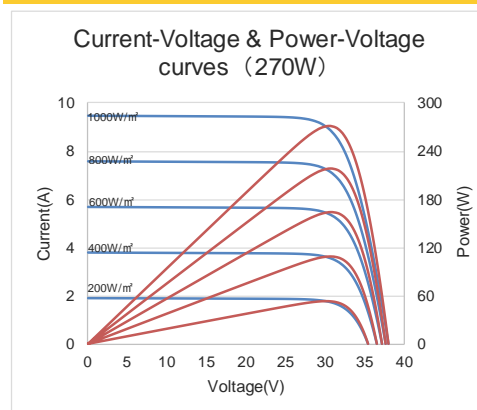

ELECTRICAL PARAMETERS (STC)

Model Number	QSA265P-60-S	QSA270P-60-S	QSA275P-60-S	QSA280P-60-S
Rated Power in Watts-Pmax (Wp)	265	270	275	280
Open Circuit Voltage-Voc (V)	37.87	38.00	38.45	38.69
Short Circuit Current-Isc (A)	9.18	9.45	9.52	9.59
Maximum Power Voltage-Vmpp (V)	30.92	31.08	31.12	31.20
Maximum Power Current-Impp (A)	8.58	8.70	8.85	8.99
Module Efficiency	16.2%	16.5%	16.9%	17.2%

STC: Irradiance 1000W/m², Cell Temperature 25°C, AM=1.5

ELECTRICAL PARAMETERS (NOCT)

Model Number	QSA265P-60-S	QSA270P-60-S	QSA275P-60-S	QSA280P-60-S
Maximum Power-Pmax (Wp)	198.8	202.5	206.3	210.0
Open Circuit Voltage-Voc (V)	34.60	34.71	35.13	35.35
Short Circuit Current-Isc (A)	7.73	7.96	8.02	8.08
Maximum Power Voltage-Vmpp (V)	27.98	28.12	28.15	28.22
Maximum Power Current-Impp (A)	7.10	7.20	7.33	7.44

NOCT: Irradiance 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s
Power Production Tolerance ±3%