



First Solar® FS Series 3™ Black PV Module

| MECHANICAL DESCRIPTION | |
|------------------------|--|
| Length | 1200mm |
| Width | 600mm |
| Weight | 12kg |
| Thickness | 6.8mm |
| Area | 0.72m ² |
| Leadwire | 2.5mm ² or 4.0mm ² , 610mm |
| Connectors | MC4 ³ |
| Bypass Diode | None |
| Cell Type | CdS/CdTe semiconductor, 154 active cells |
| Frame Material | None |
| Cover Type | 3.2mm heat strengthened front glass laminated to 3.2mm tempered back glass |
| Encapsulation | Laminate material with edge seal |

Contact Info:

First Solar
Tel (US): 877 850 3757 Email: info@firstsolar.com

First Solar® FS Series 3™ Black PV Modules represent the latest advancements in thin film solar module technology. The Series 3 Black modules are IEC 61646 and IEC 61730 certified for use in systems up to 1000 VDC, UL Listed up to 1000 VDC, and meet the requirements of Safety Class II. First Solar provides cost effective thin film module solutions to leading solar project developers and system integrators for large scale, grid-connected solar power plants. First Solar Warranty Affairs provides technical support and comprehensive product documentation to support the design, installation, and long term operations of high performance PV systems.

High Performance PV System Solutions

Key Features:

- Produces high energy output across a wide range of climatic conditions with excellent temperature and spectral response characteristics
- Proven to perform as predicted with a high Performance Ratio (PR)
- Frameless laminate is robust, cost-effective and recyclable, and does not require module grounding
- Manufactured in highly automated, state-of-the-art facilities certified to ISO 9001:2008 and ISO 14001:2004 quality and environmental management standards
- Enhanced accelerated life testing performance and robustness in hot climates and harsh operating conditions as demonstrated by Thresher and Long-Term Sequential tests



Warranty:

- Material and workmanship warranty for ten (10) years and a power output warranty of 90% of the nominal output power rating ($P_{MPp} \pm 5\%$) during the first ten (10) years and 80% during twenty-five (25) years subject to the warranty terms and conditions.

Recycling:

- Modules can be recycled easily via First Solar recycling services or customer selected third party recycling.

All specifications and warranties apply only to products sold and installed in North America.



Electrical Specifications

| MODEL NUMBERS AND RATINGS AT STC ^{1*} | | | | | | |
|--|----------------------|--------|--------|--------|--------|--------|
| Nominal Values | | FS-385 | FS-387 | FS-390 | FS-392 | FS-395 |
| Nominal Power(+/-5%) | P _{MPP} (W) | 85.0 | 87.5 | 90.0 | 92.5 | 95.0 |
| Voltage at P _{MAX} | V _{MPP} (V) | 46.4 | 47.0 | 47.4 | 47.7 | 47.5 |
| Current at P _{MAX} | I _{MPP} (A) | 1.83 | 1.86 | 1.90 | 1.94 | 2.00 |
| Open Circuit Voltage | V _{OC} (V) | 60.5 | 60.5 | 60.5 | 60.5 | 60.5 |
| Short Circuit Current | I _{SC} (A) | 1.94 | 1.99 | 2.06 | 2.11 | 2.17 |
| Maximum System Voltage | V _{sys} (V) | 1000 | | | | |
| Limiting Reverse Current | I _R (A) | 3.5 | | | | |
| Maximum Series Fuse | I _{CF} (A) | 3.5 | | | | |

| TEMPERATURE CHARACTERISTICS | | |
|--|--|-----------|
| Nominal Values | | |
| Temperature Coefficient of P _{MPP} | T _K (P _{MPP}) | -0.25%/°C |
| Temperature Coefficient of V _{OC} , high temp (>25°C) | T _K (V _{OC} , high temp) | -0.27%/°C |
| Temperature Coefficient of V _{OC} , low temp (-40°C to +25°C) | T _K (V _{OC} , low temp) | -0.20%/°C |
| Temperature Coefficient of I _{SC} | T _K (I _{SC}) | +0.04%/°C |

| MODEL NUMBERS AND RATINGS AT 800W/m ² , NOCT ² 45°C, AM 1.5 [*] | | | | | | |
|--|----------------------|--------|--------|--------|--------|--------|
| Nominal Values | | FS-385 | FS-387 | FS-390 | FS-392 | FS-395 |
| Nominal Power(+/-5%) | P _{MPP} (W) | 63.8 | 65.6 | 67.5 | 69.0 | 71.3 |
| Voltage at P _{MAX} | V _{MPP} (V) | 43.6 | 44.2 | 44.6 | 44.8 | 44.7 |
| Current at P _{MAX} | I _{MPP} (A) | 1.46 | 1.49 | 1.52 | 1.55 | 1.60 |
| Open Circuit Voltage | V _{OC} (V) | 56.3 | 56.3 | 56.3 | 56.3 | 56.3 |
| Short Circuit Current | I _{SC} (A) | 1.59 | 1.63 | 1.69 | 1.73 | 1.78 |

Reliability and Safety

Tested by leading international institutes and certified for reliability and safety.


- Certified to IEC 61646
- Certified to IEC 61730
- Certified to IEC 61701
Salt Mist Corrosion Test
- Certified to IEC 60068-2-68
Environmental Testing—Dust and Sand
- CE Marking
- Safety Class II @ 1000 V
- Eligible CSI PV Module
- UL 1703 and ULC 1703 Listed
Class B Fire Rating
(Class A Spread of Flame)
- FSEC Certification
- MCS Certification
- Passes Thresher Test
- Passes Long-Term Sequential Test



Disclaimer

The information included in this Module Datasheet is subject to change without notice and is provided for informational purposes only. No contractual rights are established or should be inferred because of user's reliance on the information contained in this Module Datasheet. Please refer to the appropriate Module User Guide and Module Product Specification document for more detailed technical information regarding module performance, installation and use.

Mechanical Drawing

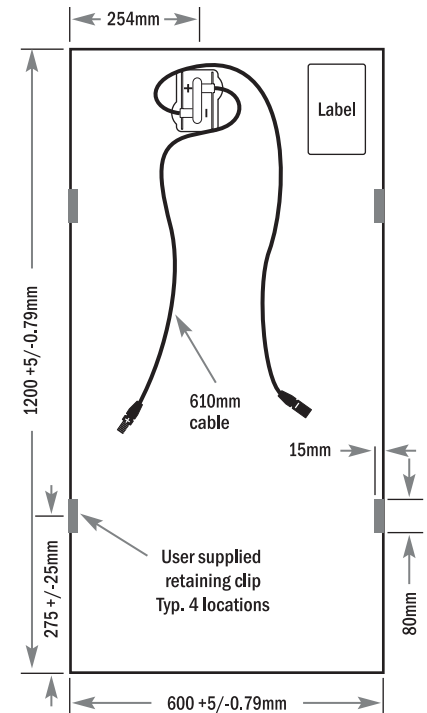

*All ratings +/-10%, unless specified otherwise. Specifications are subject to change.

¹Standard Test Conditions (STC) 1000W/m², AM 1.5, 25°C

²Nominal Operating Cell Temperature: Module operation temperature at 800W/ m² irradiance, 20°C air temperature, 1m/s wind speed.

³Multi-Contact MC4 (PV-KST4/PV-KBT4)

About First Solar

First Solar is a leading global provider of comprehensive photovoltaic (PV) energy solutions which use its advanced thin film modules. The company's integrated power plant solutions deliver an economically attractive alternative to fossil-fuel electricity generation today. By delivering advanced PV energy solutions that address contemporary energy needs, First Solar is enabling a world powered by clean, affordable solar electricity.

The First Solar logo, First Solar™, and all products denoted with ® are registered trademarks, and those denoted with a ™ are trademarks of First Solar, Inc.
FS Series 3 PV Module PD-5-401-03 Black 4 NA JANUARY 2014 | © Copyright 2014, First Solar, Inc.



www.firstsolar.com