

HYUNDAI SOLAR MODULE

**VI
SERIES**

PERC Shingled

HiE-S470VI
HiE-S480VI

HiE-S475VI
HiE-S485VI




Shingled
Technology



For Utility-Scale
Applications



More Power
Generation
In Low Light

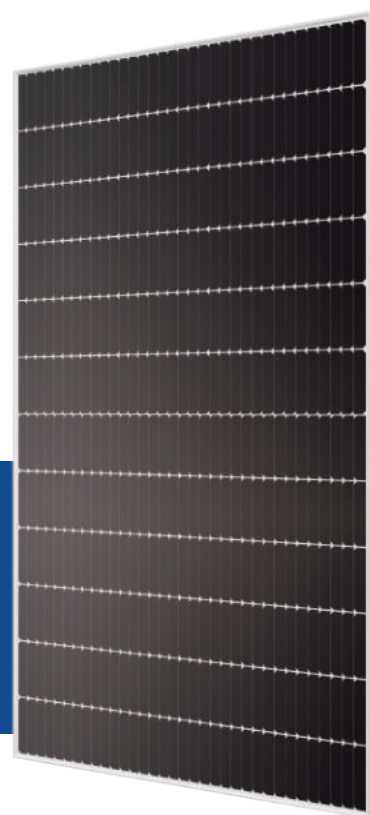

M6 PERC Shingled

M6 PERC Shingled Technology provides ultra-high efficiency with better performance in low irradiation. Maximizes installation capacity in limited space.



Anti-LID / PID

Both LID(Light Induced Degradation) and PID(Potential induced Degradation) are strictly eliminated to ensure higher actual yield during lifetime.



Mechanical Strength

Tempered glass and reinforced frame design withstand rigorous weather conditions such as heavy snow and strong wind.



Reliable Warranty

Global Brand with powerful financial strength provide reliable 25-year warranty. (Australia and Europe Only)



Corrosion Resistant

Various tests under harsh environmental conditions such as ammonia and salt-mist passed



UL / VDE Test Labs

Hyundai's R&D center is an accredited test laboratory of both UL and VDE.

Hyundai's Warranty Provisions



- **25-Year Product Warranty**
- On material and workmanship
Australia and Europe Only



- **25-Year Performance Warranty**
- Initial year: 98.0%
- Linear warranty after second year:
with 0.55%p annual degradation,
84.8% is guaranteed up to 25 years

About Hyundai Energy Solutions

Established in 1972, Hyundai Heavy Industries Group is one of the most trusted names in the heavy industries sector and is a Fortune 500 company. As a global leader and innovator, Hyundai Heavy Industries is committed to building a future growth engine by developing and investing heavily in the field of renewable energy.

As a core energy business entity of HHI, Hyundai Energy Solutions has strong pride in providing High-quality PV products to more than 3,000 customers worldwide.

Certification



Electrical Characteristics

| | | Mono-Crystalline Module (HiE-S____VI) | | | |
|----------------------------------|------|--|-------|-------|-------|
| | | 470 | 475 | 480 | 485 |
| Nominal Output (Pmpp) | W | 470 | 475 | 480 | 485 |
| Open Circuit Voltage(Voc) | V | 46.4 | 46.5 | 46.6 | 46.6 |
| Short Circuit Voltage (Isc) | A | 13.04 | 13.10 | 13.16 | 13.22 |
| Voltage at Pmax (Vmpp) | V | 38.6 | 38.7 | 38.8 | 38.8 |
| Cuurent at Pmax (Impp) | A | 12.18 | 12.27 | 12.37 | 12.50 |
| Module Efficiency | % | 20.1 | 20.3 | 20.5 | 20.7 |
| Cell Type | - | PERC Mono-Crystalline Silicon Shingled | | | |
| Maximum System Voltage | V | 1,500 | | | |
| Temperature Coefficiency of Pmax | %/°C | -0.34 | | | |
| Temperature Coefficiency of Voc | %/°C | -0.27 | | | |
| Temperature Coefficiency of Isc | %/°C | 0.04 | | | |

*All data at STC(Standard Test Conditions). Above data may be changed without prior notice.
*Tolerance of Pmax:0~+5W.
* Performance deviation of Voc [V], Isc [A], Vm[V] and Im[A]: ±3%.

Mechanical Characteristics


| | | | |
|---------------|---|-----------|--|
| Dimensions | 2,056 × 1,140 × 35mm (L × W × H) | | |
| Weight | 25kg | | |
| Solar Cells | 408 cells, PERC Mono-crystalline Shingled (166 × 166mm) | | |
| Output Cables | Length 1,200mm, 1×4mm ² | Connector | Compatible with MC4 (ZHEJIAN RENHE/05-8) |
| Junction Box | Rated current: 20A, IP67, TUV&UL | | |
| Construction | Front Glass: White toughened safety glass, 3.2mm Encapsulation: EVA (Ethylene-Vingl-Acetate) | | |
| Frame | Anodized Aluminum | | |

Installation Safety Guide


- Only qualified personnel should install or perform maintenance.
- Be aware of dangerous high DC voltage.
- Do not damage or scratch the rear surface of the module.
- Do not handle or install modules when they are wet.

| | |
|------------------------------------|---------------------------------|
| Nominal Operating Cell Temperature | 42.3°C (±2°C) |
| Operating Temperature | -40 ~ 85° C |
| Maximum System Voltage | DC 1,500 / 1,000 (IEC) |
| Maximum Reverse Current | 20A |
| Maximum Surface Load Capacity | Front 5,400 Pa Rear 2,400 Pa |

Module Diagram (Unit: mm)

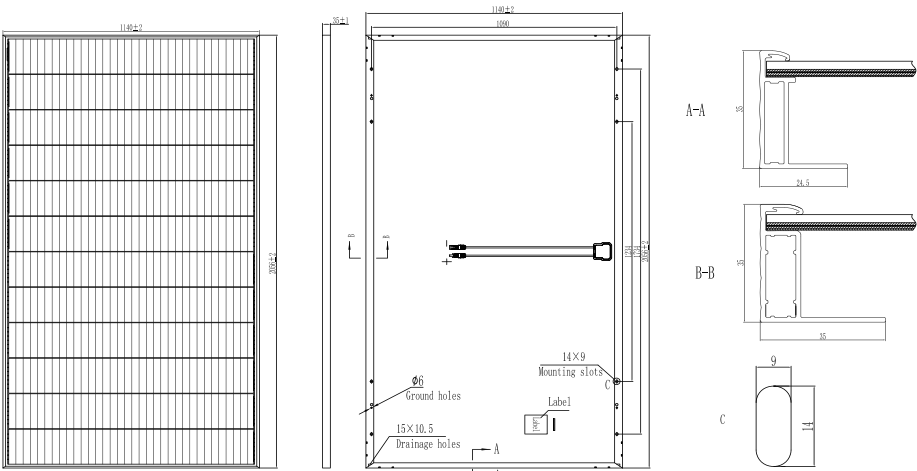

I-V Curves

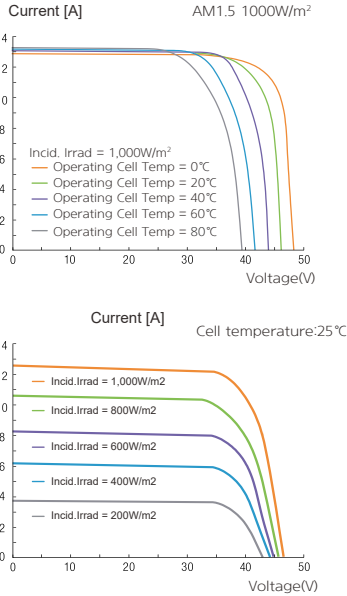

Manufactured in China



Sales & Marketing
sales@hyundai-es.co.kr

Printed Date : 08/2021