

SII SERIES

Cuts Night, Breaks Dawn

390-405W



● SII SERIES

Seraphim redefined the high-efficiency module series by integrating 158.75mm silicon wafers with PERC and half-cut cell technologies. Seraphim panel combined creative technology effectively and extremely improved the module efficiency and power out.

● KEY FEATURES

-  Less mismatch to get more power
-  Less power loss by minimizing the shading impact
-  Competitive low light performance
-  3 times EL test to ensure best quality
-  Ideal choice for utility and commercial scale projects by reduced BoS and improved ROI
-  Outstanding reliability proven by PVEL for stringent environment condition:
 - Sand, acid, salt, and hail stones
 - 2400 Pa wind load and 5400 Pa snow load
 - Anti-PID

● QUALITY SYSTEM

ISO9001 / ISO14001 / ISO45001


● PRODUCT CERTIFICATION



● INSURANCE

PICC

● WARRANTY

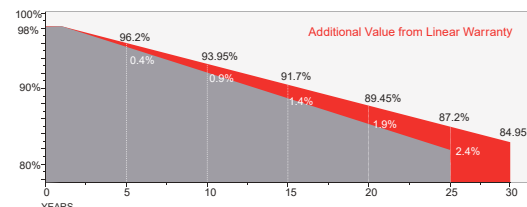

Guarantee on product material and workmanship




Linear power output warranty



JIANGSU SERAPHIM SOLAR SYSTEM CO., LTD

Add: No.10, TongshunRd, HenglinTown, Wujin District, 213000, Changzhou, China
 Tel: +86-519-68788166 Email: info@seraphim-energy.com

Technical drawing

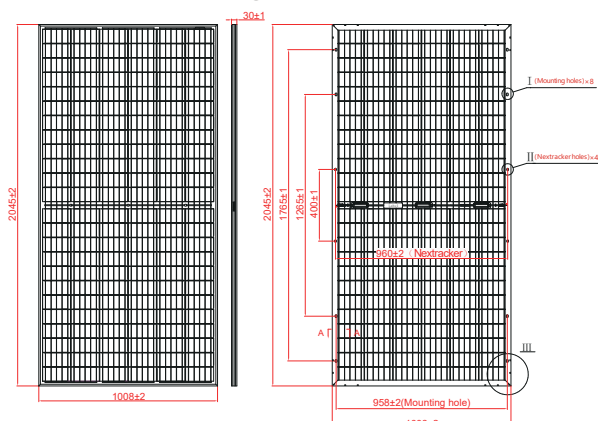

* All Dimensions in mm

* The above drawing is a graphical representation of the product. For engineering quality drawings please contact SERAPHIM.

Mechanical Specifications

External Dimension	2045 x 1008 x 30 mm
Weight	26.5 kg
Solar Cells	PERC Mono (144 pcs)
Front / Back Glass	2.0mm AR coating semi-tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP68, 3 diodes
Output Cables	4.0 mm ² , 250mm(+)/350mm(-) or Customized Length

Packing Configuration

Container	40'HQ
Pieces per Pallet	32
Pallets per Container	22
Pieces per Container	704

Electrical Characteristics

Module Type	SRP-390-BMA-BG			SRP-395-BMA-BG			SRP-400-BMA-BG			SRP-405-BMA-BG		
	Front STC	Front NOCT	Back STC	Front STC	Front NOCT	Back STC	Front STC	Front NOCT	Back STC	Front STC	Front NOCT	Back STC
Maximum Power -P _{mp} (W)	390	291	273	395	295	277	400	299	280	405	303	284
Open Circuit Voltage -V _{oc} (V)	49.1	45.4	48.7	49.3	45.6	48.9	49.5	45.8	49.1	49.7	46.0	49.3
Short Circuit Current -I _{sc} (A)	9.96	8.04	7.02	10.04	8.11	7.08	10.12	8.16	7.14	10.19	8.20	7.19
Maximum Power Voltage -V _{mp} (V)	41.3	38.2	41.4	41.5	38.4	41.6	41.7	38.7	41.8	41.9	39.0	42.0
Maximum Power Current -I _{mp} (A)	9.45	7.63	6.60	9.52	7.70	6.66	9.60	7.75	6.70	9.67	7.79	6.77
Module Efficiency STC-η _m (%)	18.92			19.16			19.40			19.65		
Power Tolerance (W)	(0, +4.99)											
Pmax Temperature Coefficient	-0.34 %/°C											
Voc Temperature Coefficient	-0.26 %/°C											
Isc Temperature Coefficient	+0.05 %/°C											

STC: Irradiance 1000 W/m² module temperature 25°C AM=1.5

Power measurement tolerance: $\pm 3\%$

Rear Side Power Gain(SRP-400-BMA-BG)

Power Gain	10%	15%	20%	25%	30%
Maximum Power - P_{mp} (W)	440	460	480	500	520
Open Circuit Voltage - V_{oc} (V)	49.5	49.5	49.5	49.5	49.5
Short Circuit Current - I_{sc} (A)	11.14	11.65	12.15	12.65	13.15
Maximum Power Voltage - V_{mp} (V)	41.7	41.7	41.7	41.7	41.7
Maximum Power Current - I_{mp} (A)	10.56	11.04	11.52	11.99	12.47

Application Conditions

Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	20 A
Operating Temperature	-40~+85 °C
Nominal Operating Cell Temperature	45±2 °C
Bifaciality	70%±10%
Mechanical Load	Front side 5400 Pa / Back side 2400 Pa

I-V Curve

