

powered by

**Q.ANTUM DUO Z**

# Q.PEAK DUO XL-G10.2

## 470-490

ENDURING HIGH  
PERFORMANCE



#### BREAKING THE 21% EFFICIENCY BARRIER

Q.ANTUM DUO Z Technology with zero gap cell layout boosts module efficiency up to 21.4%.



#### LOW ELECTRICITY GENERATION COSTS

Higher yield per surface area, lower BOS costs and up to 75 watts more module power than standard 144 half-cell modules.



#### ENDURING HIGH PERFORMANCE

Long-term yield security with Anti LID Technology, Hot-Spot Protect and Traceable Quality Tra.Q™.



#### EXTREME WEATHER RATING

High-tech aluminium alloy frame, certified for high snow (5400Pa) and wind loads (3000Pa).



#### A RELIABLE INVESTMENT

Inclusive 12-year product warranty and 25-year linear performance warranty<sup>1</sup>.



#### STATE OF THE ART MODULE TECHNOLOGY

Q.ANTUM DUO combines cutting edge cell separation and innovative 12-busbar design with Q.ANTUM Technology.

<sup>1</sup> See data sheet on rear for further information.

#### THE IDEAL SOLUTION FOR:



Ground-mounted  
solar power plants


Engineered in Germany

**Q CELLS**

## MECHANICAL SPECIFICATION

Format	2216 mm × 1045 mm × 35 mm (including frame)
Weight	26.5 kg
Front Cover	3.2 mm thermally pre-stressed glass with anti-reflection technology
Back Cover	Composite film
Frame	Anodised aluminium
Cell	6 × 26 monocrystalline Q.ANTUM solar half cells
Junction box	53-101 mm × 32-60 mm × 15-18 mm Protection class IP67, with bypass diodes
Cable	4 mm <sup>2</sup> Solar cable; (+) ≥ 700 mm, (–) ≥ 350 mm*
Connector	Stäubli MC4-Evo2, Hanwha Q CELLS HQC4; IP68

\*Long cables (+) ≥ 1450 mm, (–) ≥ 1450 mm for landscape installation are available upon request.

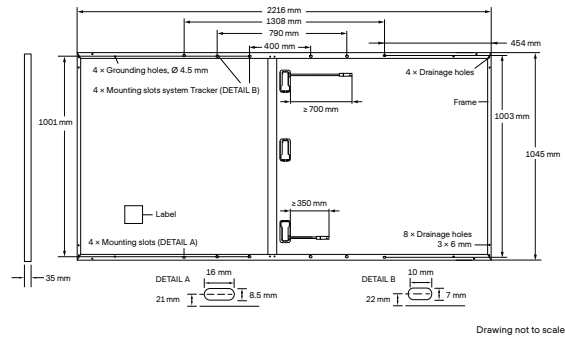


## ELECTRICAL CHARACTERISTICS

POWER CLASS				475	480	485	490
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC <sup>1</sup> (POWER TOLERANCE +5 W / –0 W)							
Minimum	Power at MPP <sup>1</sup>	P <sub>MPP</sub>	[W]	475	480	485	490
	Short Circuit Current <sup>1</sup>	I <sub>SC</sub>	[A]	11.24	11.26	11.29	11.31
	Open Circuit Voltage <sup>1</sup>	V <sub>OC</sub>	[V]	53.58	53.61	53.64	53.68
	Current at MPP	I <sub>MPP</sub>	[A]	10.66	10.71	10.76	10.81
	Voltage at MPP	V <sub>MPP</sub>	[V]	44.54	44.81	45.07	45.33
	Efficiency <sup>1</sup>	η	[%]	≥20.5	≥20.7	≥20.9	≥21.2
MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT <sup>2</sup>							
Minimum	Power at MPP	P <sub>MPP</sub>	[W]	356.4	360.1	363.9	367.6
	Short Circuit Current	I <sub>SC</sub>	[A]	9.05	9.07	9.09	9.12
	Open Circuit Voltage	V <sub>OC</sub>	[V]	50.53	50.56	50.59	50.62
	Current at MPP	I <sub>MPP</sub>	[A]	8.39	8.43	8.47	8.52
	Voltage at MPP	V <sub>MPP</sub>	[V]	42.49	42.72	42.94	43.17

<sup>1</sup>Measurement tolerances P<sub>MPP</sub> ± 3%; I<sub>SC</sub>; V<sub>OC</sub> ± 5% at STC: 1000 W/m<sup>2</sup>, 25 ± 2°C, AM 1.5 according to IEC 60904-3 • 2800 W/m<sup>2</sup>, NMOT, spectrum AM 1.5

### Q CELLS PERFORMANCE WARRANTY

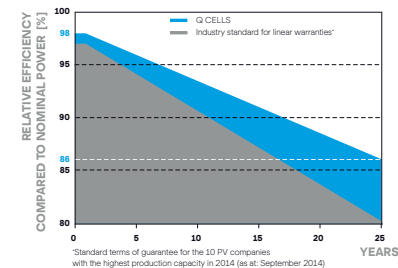


At least 98% of nominal power during first year. Thereafter max. 0.5% degradation per year. At least 93.5% of nominal power up to 10 years. At least 86% of nominal power up to 25 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Q CELLS sales organisation of your respective country.

\*Standard terms of guarantee for the 10 PV companies with the highest production capacity in 2014 (as at September 2014)

### PERFORMANCE AT LOW IRRADIANCE

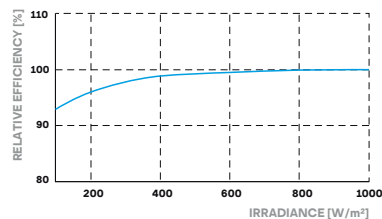

Typical module performance under low irradiance conditions in comparison to STC conditions (25°C, 1000 W/m<sup>2</sup>).

### TEMPERATURE COEFFICIENTS

Temperature Coefficient of I <sub>SC</sub>	α	[%/K]	+0.04	Temperature Coefficient of V <sub>OC</sub>	β	[%/K]	–0.27
Temperature Coefficient of P <sub>MPP</sub>	γ	[%/K]	–0.34	Nominal Module Operating Temperature	NMOT	[°C]	43 ± 3

## PROPERTIES FOR SYSTEM DESIGN

Maximum System Voltage	V <sub>SYS</sub> [V]	1500	PV module classification	Class II
Maximum Reverse Current	I <sub>R</sub> [A]	20	Fire Rating based on ANSI / UL 61730	C / TYPE 1
Max. Design Load, Push / Pull	[Pa]	3600 / 2000	Permitted Module Temperature on Continuous Duty	–40°C - +85°C
Max. Test Load, Push / Pull	[Pa]	5400 / 3000		

## QUALIFICATIONS AND CERTIFICATES

IEC 61215:2016;  
IEC 61730:2016.  
This data sheet complies  
with DIN EN 50380.



## PACKAGING INFORMATION

Vertical packaging	2306mm	1150mm	1215mm	835kg	12 pallets	20 pallets	30 modules
--------------------	--------	--------	--------	-------	------------	------------	------------

**Note:** Installation instructions must be followed. See the installation and operating manual or contact our technical service department for further information on approved installation and use of this product.

**Made in Malaysia**

**Hanwha Q CELLS Australia Pty Ltd**

Suite 1, Level 1, 15 Blue Street, North Sydney, NSW 2060, Australia | **TEL** +61 (0)2 9016 3033 | **FAX** +61 (0)2 9016 3032 | **EMAIL** q-cells-australia@q-cells.com | **WEB** www.q-cells.com/au

Engineered in Germany

**Q CELLS**