




Technical Data sonnenBatterie eco 8.0

| | eco 8.0/2.5 | eco 8.0/5 | eco 8.0/7.5 | eco 8.0/10 | eco 8.0/12.5 | eco 8.0/15 |
|--|------------------------------|-----------|-------------|------------|--------------|------------|
| Nominal battery capacity in kWh | 2.5 | 5.0 | 7.5 | 10.0 | 12.5 | 15.0 |
| Depth of discharge (DoD) | 90% | | | | | |
| Cell technology | LFP (Lithium Iron Phosphate) | | | | | |
| Cabinet option 1 (5.0 kWh) | | | | | | |
| Weight in kg | 58 | 81 | - | - | - | - |
| Dimensions (H/W/D) in cm | 88/67/23 | 88/67/23 | - | - | - | - |
| Cabinet option 2 (5.0 kWh - 10.0 kWh)¹ | | | | | | |
| Weight in kg | 74 | 97 | 120 | 143 | - | - |
| Dimensions (H/W/D) in cm | 137/67/23 | 137/67/23 | 137/67/23 | 137/67/23 | - | - |
| Cabinet option 3 (5.0 kWh - 15.0 kWh)¹ | | | | | | |
| Weight in kg | 85 | 108 | 131 | 154 | 177 | 200 |
| Dimensions (H/W/D) in cm | 186/67/23 | 186/67/23 | 186/67/23 | 186/67/23 | 186/67/23 | 186/67/23 |
| Nominal power (charging/discharging) in kW | 1.1 | 2.5 | 3.3 | 3.3 | 3.3 | 3.3 |
| Max. inverter efficiency | 96% | | | | | |
| Max. battery efficiency | 98% | | | | | |
| Ambient temperature range | -5°C - +45°C² | | | | | |
| Dust and water protection | IP30 | | | | | |

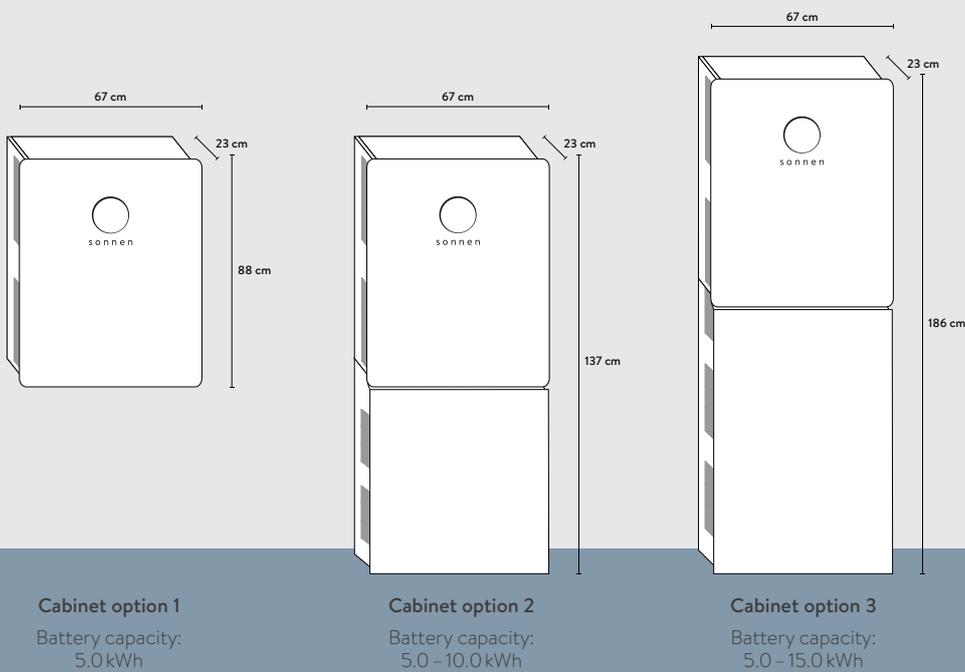

Technical Data sonnenBatterie eco 8.0

| | eco 8.0/2.5 | eco 8.0/5 | eco 8.0/7.5 | eco 8.0/10 | eco 8.0/12.5 | eco 8.0/15 |
|----------------------|---|-----------|-------------|------------|--------------|------------|
| Operating mode | three phase | | | | | |
| Tests and directives | SGS TÜV Saar, UN 38.3, IEC 62133, IEC 62040-1, AS/NZS 4777.2, IEC 62619 | | | | | |
| Battery service life | Anytime within warranty period | | | | | |
| Warranty | 10 years ³ | | | | | |
| Cycles | 10,000 ³ | | | | | |

Available options

| | |
|---------------------|--------------------|
| Multi-Touch-Display | 7 inches |
| sonnenBackup-Box | emergency backup |
| sonnenWallmount | installation mount |

We reserve the right to make technical changes and updates without prior notice. Specific values, performance data and other information in this data sheet, brochures and other product information, as well as illustrations and drawings in these documents, are solely illustrative and are subject to ongoing revision and modification. We do not warrant the accuracy or completeness of any information in these documents unless otherwise explicitly stated. Only the information in order confirmation documents or purchase contracts is binding.

¹ There are two cabinet versions available. By default, the large cabinet is included (Dimensions H/W/D 98/67/23). If a small cabinet is needed for a storage battery of 5.0 kWh up to 10.0 kWh, this must be specified when ordering. ² Derating at approx. 35 °C. ³ Warranty on all parts. To learn more about our current warranty terms and conditions, please visit [sonnenbatterie.de/en/terms-and-conditions](https://www.sonnenbatterie.de/en/terms-and-conditions) or call our customer hotline and request a copy. · Standard housing color: white. Housing color black only on request.