



15 YEARS  
LONGER THAN  
INDUSTRY  
STANDARD OF  
10 YEARS

# LG NeON<sup>®</sup> 2

LG 350/355/360N1C-N5

THE HIGH PERFORMER

UP TO 20.8% MODULE EFFICIENCY

## Awards Received By LG Solar<sup>™</sup>



## THE NeON<sup>®</sup> 2 - THE PANEL OF THE FUTURE AVAILABLE TODAY

The LG NeON<sup>®</sup> 2 has seen many improvements in the past years, from longer warranties to lower degradation. This panel is ideal for homes seeking a visually pleasing solar panel and for roofs where space is tight or where future system expansions are considered e.g. to incorporate battery storage.

The LG NeON<sup>®</sup> 2 panels with their double sided cells and CELLO technology absorb light from the front and the back of the cell. This technology sets a new standard for innovation and was recognised with the Photovoltaic Innovation Award at the Intersolar Industry Event in Germany. LG also won the 2016 Intersolar award for our new NeON BiFacial range.



### Great Visual Appearance

LG NeON<sup>®</sup> 2 panels have been designed with appearance in mind. Their black cells, black frames and thinner wire busbars give an aesthetically pleasing uniform black appearance. Your home deserves the LG NeON<sup>®</sup> 2.




### 25 Years Product Warranty (Parts & Labour)

The LG product warranty is many years longer than many competitors standard 10 or 12 years. The Warranty is provided by LG Electronics Australia and New Zealand. The warranty includes replacement, labour and transport.



### More Power per Square Metre

LG NeON<sup>®</sup> 2's 360W are a similar physical size to many competing 330W panels. This means with the LG NeON<sup>®</sup> 2 360W you get 9% more electricity per square metre than a 330W panel. So you can install more kW of solar on your roof with the LG NeON<sup>®</sup> 2.



### Improved 25 Year Performance Warranty

The initial degradation of the module has been improved from -3% to -2%, in the 1st year and the annual rate of degradation has fallen from -0.7%/year to -0.33%/ year thereafter. This brings an 90.08% warranted output after 25 years, compared to 80.7% for many competing panels.

## ABOUT LG ELECTRONICS

LG Electronics embarked on a solar energy research programme in 1985, using our vast experience in semi-conductors, chemistry and electronics. LG Solar modules are now available in over 50 countries. In 2013, 2015 and 2016 the LG NeON<sup>®</sup> range won the acclaimed Intersolar Award in Germany, which demonstrates LG Solar's lead in innovation and commitment to the renewable energy industry. Additionally, LG Solar™ won the Australian Top Brand Award in 2016, 2017, 2018, 2019 and 2020. LG Solar has also been voted WINNER Trusted Brands 2020 - SOLAR PANELS by Reader's Digest from over 3,000 Australian consumers surveyed. With many lesser known brand panels selling in Australia, LG Solar panels offer a peace of mind solution, as they are backed by an established global brand with a long local support history.

## KEY ADVANTAGES



### Proven Field Performance

LG has been involved in a number of comparison tests of the LG panels against many other brand panels. LG NeON<sup>®</sup> 2 models are consistently among the best performing in these tests.



### Additional Certification

LG NeON<sup>®</sup> 2 panels have received additional certification including for; Salt Mist Corrosion to maximum severity 6. Ammonia Resistance certification and PID Resistance Tests.



### Strict Quality Control Reliable for the Future

The quality control of LG world-class solar production is monitored and improved using Six Sigma techniques via 500+ monitoring points to effectively maintain and improve our uncompromising quality.



### Multi Anti-reflective Coatings Increase Output

LG Solar™ is using an anti-reflective coating on the panels glass as well as on the cell surface to ensure more light is absorbed in the panel and not reflected. More absorbed light means more electricity generation.



### High Wind Load Resistance

LG panels have a strong double walled frame. When it comes to wind forces (rear load) our panel under test withstood a wind load of 4000 Pascals.



### "CELLO" Technology Increases Power

"CELLO" Multi wire busbar cell technology lowers electrical resistance and increases panel efficiency, giving more power per panel and provides a more uniform look to the panel.



### Low LID

The N-type doping of the NeON<sup>®</sup> cells results in extremely low Light Induced Degradation (LID) when compared with the standard P-type cells. This means more electricity generation over the life of the panel, as the panel degrades less.




### Extensive Testing Programme

LG solar panels are tested at least up to 2 times the International Standards at our in-house testing laboratories, ensuring a very robust and longer lasting solar module.



### Improved High Temperature Performance

Solar panels slowly lose ability to generate power as they get hotter. LG NeON<sup>®</sup> 2, has an improved temperature co-efficient to standard modules, which means in hot weather LG NeON<sup>®</sup> 2 panels will deliver higher output.



### Positive Tolerance (0/+3%)

If you buy a 360 Watt panel then the flash test of this panel will show somewhere between 360W and 370W. Some competitor panels have -/+ tolerance, so you could get a flash test result below the rated Watt, meaning you pay for Watts you never get.



### Anti PID Technology for Yield Security

PID (Potential Induced Degradation) affects the long term ability of panels to produce high level electricity output. LG panels have anti PID technology and have been successfully tested by leading third party laboratories regarding PID resistance.



### Automated Production in South Korea

All LG solar panels sold in Australia and New Zealand are manufactured in a custom designed and fully automated production line by LG in Gumi, South Korea ensuring extremely low tolerances. This means great quality and build consistency between panels.


## LG NeON<sup>®</sup> 2 – ENHANCED. MORE EFFICIENT. ADVANCED.

LG NeON<sup>®</sup> 2 solar panels now offer even more output. Featuring a classy design and with a total of 60 cells, it can withstand under test a static front panel load of 5400 pascals and rear wind load of 4000 pascals. LG has lengthened its product warranty to 25 years and has improved its linear performance guarantee to 90.08 % of nominal output after 25 years. The LG NeON<sup>®</sup> 2 is an excellent choice for high performing long lasting solar systems.

### LOCAL WARRANTY, GLOBAL STRENGTH


LG Solar™ is part of LG Electronics Inc., a global and financially strong company, with over 50 years of experience in technology. Good to know: LG Electronics Australia Pty Ltd is the warrantor in Australia and NZ for your solar modules. So LG support, via offices in every Australian mainland state and NZ and through our 80 strong, Australia wide dealer network, is only a phone call away, ph 1300 152 179.

The Warrantor's 2019 Sales in Billions of US Dollars\*

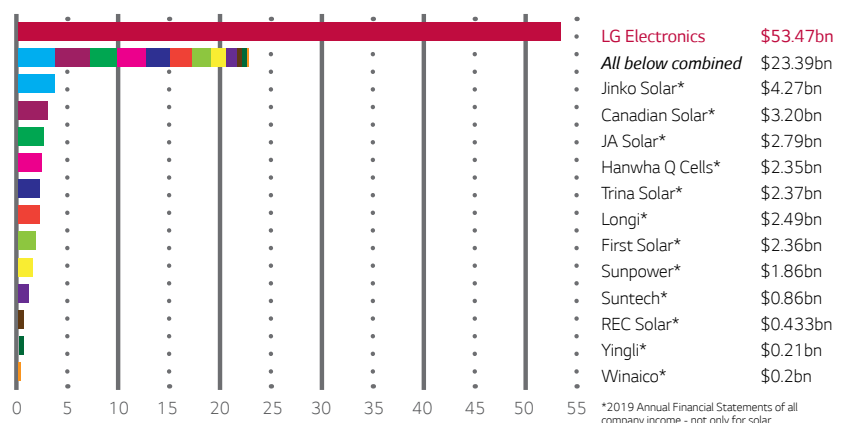


### HIGHER OUTPUT, HIGHER YIELD

The NeON<sup>®</sup> Cell produces energy from both the front and the back of the cell. This innovative approach allows the absorption of light from the back of the cell which raises the panel's efficiency and power output. Standard panels only absorb light from the front.

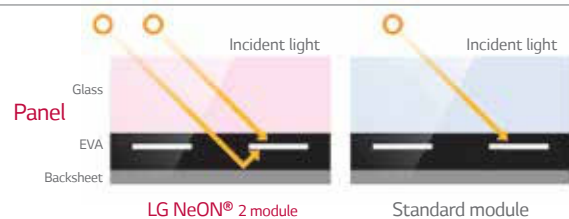

### EXCELLENT QUALITY, THOROUGHLY TESTED

You can rely on LG. We test our products with at least double the intensity specified in the IEC standard. (International Quality Solar Standard).

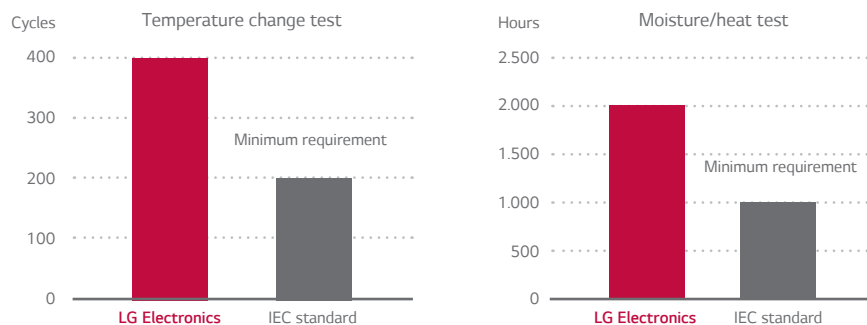

### Awards Received By LG Solar™



Our panel range have won a string of Local and International Awards.

### POWERFUL DESIGN, GUARANTEED ROBUST

With reinforced frame design, the LG NeON<sup>®</sup> 2 can under test withstand a front load of 5400 Pa which is the equivalent of 943 kg over the size of the panel. The rear load/wind load of the panel under test is 4000 Pa.



LG offers a longer 25 year parts and labour warranty than many competitors who provide 10 and 12 year warranties.



## Mechanical Properties

Cells	60 Cells (6 x 10)
Cell Vendor	LG
Cell Type	Monocrystalline / N-type
Number of Busbar	12EA
Dimensions (L x W x H)	1700 x 1016 x 40 mm
Front Load (test)	5400 Pa
Rear Load (test)	4000 Pa
Weight	18 kg
Connector Type	Genuine MC4, IP68 (Male: PV-KST4) (Female: PV-KBT4)
Junction Box	IP68 with 3 bypass diodes
Length of Cables	2 x 1000 mm
Glass (Material)	Tempered Glass with AR Coating
Frame	Anodised aluminum with protective matt black coating

## Certifications and Warranty


Certifications	ISO 9001, ISO 14001, ISO 50001 IEC 61215-1/-1-1/2:2016, IEC 61730-1/2:2016 OHSAS 18001
Salt Mist Corrosion Test	IEC 61701: 2012 Severity 6
Ammonia Corrosion Test	IEC 62716: 2013
Module Fire Performance	Class C (UL 790)
Product Warranty	25 Years
Output Warranty of P <sub>max</sub> (Measurement Tolerance ± 3%)	Linear Warranty <sup>1</sup>

<sup>1</sup> 1) 1st year: 98%, 2) After 1st year: 0.33% annual degradation, 3) 90.08% for 25 years.


## Temperature Characteristics

NMOT	42 ± 3 °C
P <sub>max</sub>	-0.34 %/°C
V <sub>oc</sub>	-0.26 %/°C
I <sub>sc</sub>	0.03 %/°C

## Current – Voltage characteristics at various irradiance levels

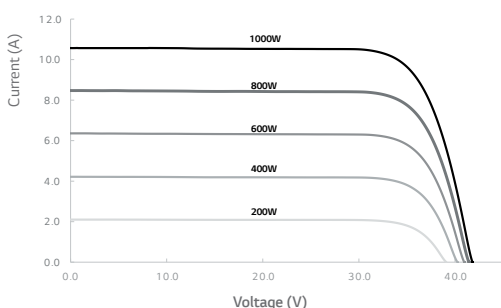

## Current – Voltage characteristics at various cell temperatures

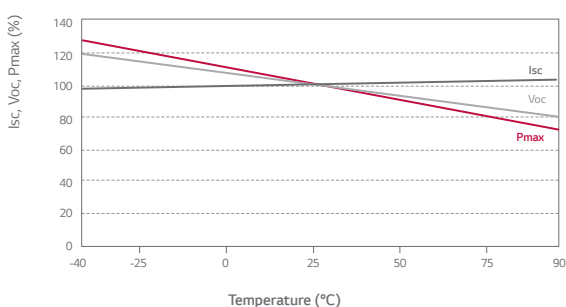

## Electrical Properties (STC<sup>2</sup>)

Module Type	LG350N1C-N5	LG355N1C-N5	LG360N1C-N5
Maximum Power P <sub>max</sub> (W)	350	355	360
MPP Voltage V <sub>mpp</sub> (V)	34.3	34.7	35.1
MPP Current I <sub>mp</sub> (A)	10.22	10.25	10.28
Open Circuit Voltage V <sub>oc</sub> (V)	41.4	41.5	41.6
Short Circuit Current I <sub>sc</sub> (A)	10.76	10.80	10.84
Module Efficiency (%)	20.3	20.6	20.8
Operating Temperature (°C)	-40 ~ +90		
Maximum System Voltage (V)	1000		
Maximum Series Fuse Rating (A)	20		
Power Tolerance (%)	0 ~ +3		

<sup>2</sup> STC (Standard Test Condition): Irradiance 1000 W/m<sup>2</sup>, Module Temperature 25 °C, AM 1.5.  
The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.

## Electrical Properties (NMOT<sup>3</sup>)

Module Type	LG350N1C-N5	LG355N1C-N5	LG360N1C-N5
Maximum Power P <sub>max</sub> (W)	262	266	270
MPP Voltage V <sub>mpp</sub> (V)	32.2	32.6	33.0
MPP Current I <sub>mp</sub> (A)	8.15	8.17	8.20
Open Circuit Voltage V <sub>oc</sub> (V)	39.0	39.1	39.2
Short Circuit Current I <sub>sc</sub> (A)	8.64	8.68	8.71

<sup>3</sup> NMOT (Nominal Module Operating Temperature): Irradiance 800 W/m<sup>2</sup>, ambient temperature 20 °C, wind speed 1 m/s, Spectrum AM 1.5.

## Dimensions (mm)

